


# ■ビニル絶縁付丸形端子(ストレート形)



E42024 
 LR20812 
 JQ0608019 
 JIS C 2805


形番	規格	寸法(mm)							標準色	適用電線範囲 撚線(mm <sup>2</sup> )	適用圧着工具			1箱 入数 (個)
		φd2	B	L	F	ℓ	φD	板厚			手動	空気圧式	油圧式	
VO.5-2		2.2	5.2	16.4	5.8	8.0	1.9	0.5	黄	0.2~0.5 (0.2 (AWG#24) 0.3 (AWG#22) 0.5	YNT-2622	YA-1, YA-2 YAT-1A YAT-2A YAD-1A YAD-2A	BCT-0514	1,000
VO.5-3		3.2												
VO.5-3.7		3.7	6.6	19.0	7.7									
VO.5-4		4.3												
VO.5-5		5.3	8.0	7.0										
V1.25-2		2.2	5.5	15.7	4.0	9.0	3.2	0.8	赤	※ 0.25~1.65 ※ (0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 (1.25 (AWG#16))	YNT-2216	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000
V1.25-3(RAV1.25-3)		3.2												
V1.25-MS3		3.2	8.0	20.0	7.0									
V1.25-L3		3.7	5.5	15.7	4.0									
V1.25-3.7		3.7	6.6	18.6	6.3									
V1.25-M3(RAV1.25-3.5)		4.3	8.0	20.0	7.0									
V1.25-M4		4.3	8.0	20.0	7.0									
V1.25-4(RAV1.25-4)		5.3	9.0	24.6	11.1									
V1.25-5NS		5.3	8.0	20.0	7.0									
V1.25-5(RAV1.25-5)		6.4	11.6	25.9	11.1									
V1.25-6		8.4	13.6	29.7	13.9									
V1.25-8		10.5	13.6	29.7	13.9									
V1.25-10		10.5	13.6	29.7	13.9									
V2-S2		2.2	6.4	16.5	4.3	9.0	3.9	0.8	青	1.04~2.63 (1.25 (AWG#16) 2.0 (AWG#14))	YNT-1614	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000
V2-MS3		3.2	5.5	17.4	5.6									
V2-S3.3		3.2	6.4	16.5	4.3									
V2-3		3.7	8.5	21.0	7.8									
V2-S3		3.7	6.4	16.5	4.3									
V2-P3.5		3.7	7.0	20.2	7.7									
V2-M3(RAV2-3.5)		4.3	6.6	18.6	6.3									
V2-M4		4.3	7.0	20.2	7.7									
V2-P4		4.3	8.5	21.0	7.8									
V2-4(RAV2-4)		5.3	9.0	24.5	11.0									
V2-M5		5.3	9.5	21.0	7.3									
V2-5NS		6.4	12.0	26.0	11.0									
V2-5(RAV2-5)		6.4	12.0	26.0	11.0									
V2-6(RAV2-6)		8.4	13.6	29.7	13.9									
V2-8(RAV2-8)		8.4	13.6	29.7	13.9									
V2-10		10.5	13.6	29.7	13.9									
V2-12		13.0	19.0	35.2	16.7									
V2-14		15.0	27.0	43.7	21.2									
V2-16		17.0	27.0	43.7	21.2									
V2-20		21.0	27.0	43.7	21.2									

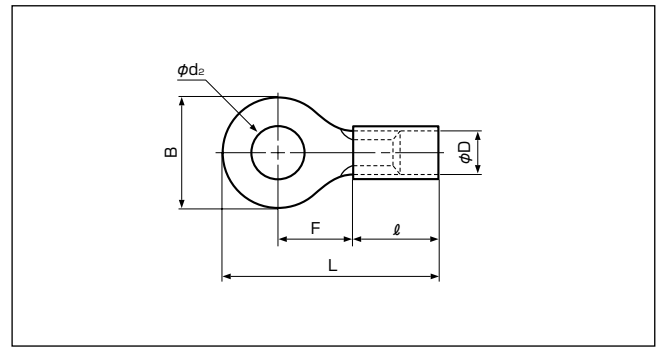







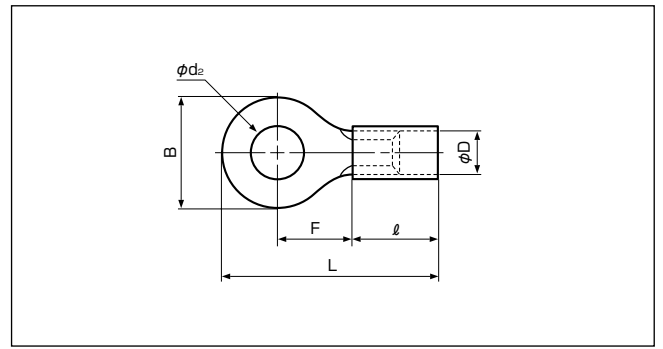




























注1) ( )はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No.JIS C 2805

注2) ※印は電線の合計断面積が0.5mm<sup>2</sup>以上となる様にして使用すればより確実になります。(例:0.3mm<sup>2</sup>を2つ折りにして圧着、0.5mm<sup>2</sup>はそのまま圧着)

注3) 本製品の中には多少納期を要するものもあります。


注4) VO.5-( )におけるUL登録の適用電線はAWG#26~AWG#22です。




形番	規格	寸法(mm)							標準色	適用電線範囲		適用圧着工具			1箱 入数 (個)
		φd2	B	L	F	ℓ	φD	板厚		撚線(mm <sup>2</sup> )	手動	空気圧式	油圧式		
V5.5-3	 	3.2	9.5	26.5	8.3	13.5	5.4	1.0	黄	2.63~6.64 {3.5(AWG#12) 5.5(AWG#10)}	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500	
V5.5-S3	 	3.7	7.2	23.0	5.9										
V5.5-S4	 	4.3	9.5	26.5	8.3										
V5.5-4(RAV5.5-4)	  														
V5.5-5(RAV5.5-5)	  	5.3	13.2	29.1	9.0										
V5.5-S5	 														
V5.5-6(RAV5.5-6)	  	6.4	12.0	32.5	13.0										
V5.5-S6	 														
V5.5-S8	 	8.4	13.2	29.1	9.0										
V5.5-8(RAV5.5-8)	  														
V5.5-10(RAV5.5-10)	  	10.5	15.0	34.7	13.7										
V5.5-12	 	13.0	19.2	39.1	16.0										
V5.5-14	 	15.0	32.0	54.8	25.3										
V5.5-16	 	17.0													
V5.5-18	 	19.0													
V5.5-20	 	21.0													

注1) ( )はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No.JIS C 2805

注2) 本製品の中には多少納期を要するものもあります。



# ■ビニル絶縁付丸形端子(F形)

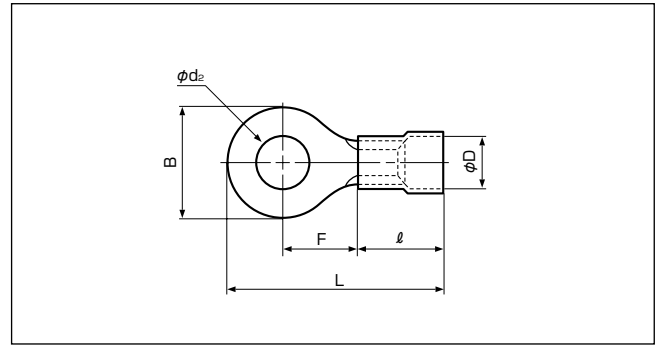

E42024 
 LR20812 
 JQ0608019  
 JIS C 2805


形番	規格	寸法(mm)							標準色	適用電線範囲 撚線(mm <sup>2</sup> )	適用圧着工具			1箱 入数 (個)		
		φd <sub>2</sub>	B	L	F	ℓ	φD	板厚			手動	空気圧式	油圧式			
FV0.5-2		2.2	5.2	16.4	5.8	8.0	2.9	0.5	黄	0.2~0.5 {0.2 (AWG#24) 0.3 (AWG#22) 0.5}	YNT-2622	YA-1, YA-2 YAT-1A YAT-2A YAD-1A YAD-2A	BCT-0514	1,000		
FV0.5-3		3.2														
FV0.5-3.7		3.7														
FV0.5-4		4.3														
FV0.5-5		5.3														
FV1.25-2		2.2	5.5	15.7	4.0	9.0	4.0	0.8	赤	※ 0.25~1.65 ※ {0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 1.25 (AWG#16)}	YNT-2216	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000		
FV1.25-3(RBV1.25-3)		3.2														
FV1.25-MS3		3.2														
FV1.25-L3		8.0														
FV1.25-3.7		5.5														
FV1.25-M3(RBV1.25-3.5)		6.6														
FV1.25-M4		4.3														
FV1.25-4(RBV1.25-4)		8.0														
FV1.25-5(RBV1.25-5)		5.3														
FV1.25-6		6.4														
FV1.25-8		8.4														
FV1.25-10		10.5														
FV2-S2		2.2	6.4	16.5	4.3	9.0	4.5	0.8	青	1.04~2.63 {1.25 (AWG#16) 2.0 (AWG#14)}	YNT-1614	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000		
FV2-MS3		5.5														
FV2-S3.3		3.2														
FV2-3		8.5														
FV2-S3		6.4														
FV2-P3.5		7.0														
FV2-M3(RBV2-3.5)		6.6														
FV2-M4		4.3														
FV2-4(RBV2-4)		8.5														
FV2-M5		5.3														
FV2-5(RBV2-5)		9.5														
FV2-6(RBV2-6)		6.4														
FV2-8(RBV2-8)		8.4														
FV2-10		10.5														
FV2-12		13.0														
FV2-14		15.0														
FV2-16		17.0														
FV2-20		21.0														
															500	
																250









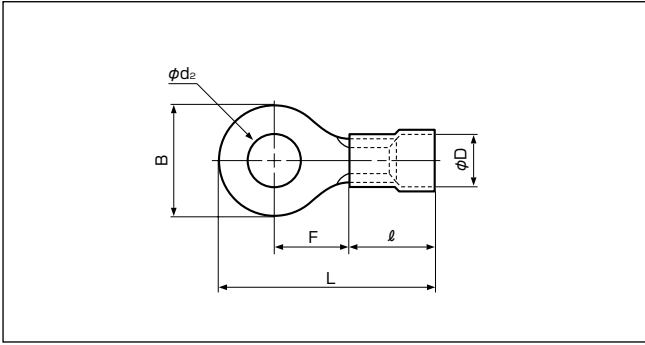






























注1) ( )はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No.JIS C 2805

注2) ※印は電線の合計断面積が0.5mm<sup>2</sup>以上となる様にして使用すればより確実にになります。(例:0.3mm<sup>2</sup>を2つ折りにして圧着、0.5mm<sup>2</sup>はそのまま圧着)

注3) 本製品の中には多少納期を要するものもあります。


注4) FV0.5-( )におけるUL登録の適用電線はAWG#26~AWG#22です。




形番	規格	寸法(mm)							標準色	適用電線範囲	適用圧着工具			1箱 入数 (個)
		φd2	B	L	F	ℓ	φD	板厚		撚線(mm <sup>2</sup> )	手動	空気圧式	油圧式	
FV5.5-S3.3	 	3.2	7.2	23.0	5.9	13.5	6.8	1.0	黄	2.63~6.64 {3.5(AWG#12)} {5.5(AWG#10)}	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500
FV5.5-3	 		9.5	26.5	8.3									
FV5.5-S3	 	3.7	7.2	23.0	5.9									
FV5.5-S4	 		4.3	9.5	26.5									
FV5.5-4(RBV5.5-4)	  	5.3		13.2	29.1									
FV5.5-5(RBV5.5-5)	  		6.4	12.0	32.5									
FV5.5-S5	 	8.4		13.2	29.1									
FV5.5-6(RBV5.5-6)	  		10.5	15.0	34.7									
FV5.5-S6	 	13.0		19.2	39.1									
FV5.5-S8	 		15.0	32.0	54.8									
FV5.5-8(RBV5.5-8)	  	17.0												
FV5.5-10(RBV5.5-10)	  		19.0											
FV5.5-12	 	21.0												
FV5.5-14	 													
FV5.5-16	 													
FV5.5-18	 													
FV5.5-20	 													

注1) ( )はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No.JIS C 2805

注2) 本製品の中には多少納期を要するものもあります。



# ■ナイロン絶縁付丸形端子(ストレート形)

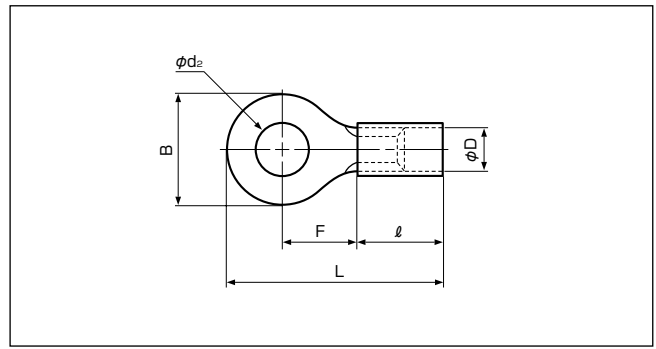

E42024 
 LR20812 
 JQ0608019 
 JIS C 2805

形番	規格	寸法(mm)							標準色	適用電線範囲 撚線(mm <sup>2</sup> )	適用圧着工具			1箱 入数 (個)
		φd2	B	L	F	ℓ	φD	板厚			手動	空気圧式	油圧式	
N0.5-2		2.2	5.2	16.4	5.8	8.0	1.9	0.5	黄透明	0.2~0.5 (0.2 (AWG#24) 0.3 (AWG#22) 0.5	YNT-2622	YA-1, YA-2 YAT-1A YAT-2A YAD-1A YAD-2A	BCT-0514	1,000
N0.5-3		3.2												
N0.5-3.7		3.7												
N0.5-4		4.3												
N0.5-5		5.3												
N1.25-2		2.2	5.5	15.7	4.0	9.0	3.2	0.8	赤	※ 0.25~1.65 ※ (0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 (1.25 (AWG#16))	YNT-2216	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000
N1.25-3(RAP1.25-3)		3.2												
N1.25-MS3			8.0	20.0	7.0									
N1.25-L3		3.7												
N1.25-3.7			6.6	18.6	6.3									
N1.25-M3(RAP1.25-3.5)		4.3												
N1.25-M4			8.0	25.9	11.1									
N1.25-4(RAP1.25-4)		5.3												
N1.25-5(RAP1.25-5)			6.4	17.4	5.6									
N1.25-6		8.4												21.0
N1.25-8			3.2	16.5	4.3									
N1.25-10		6.4				16.5	4.3							
N2-S2			8.5	21.0	7.8									
N2-MS3		3.7				20.2	7.7							
N2-S3.3			6.6	18.6	6.3									
N2-3		4.3				20.2	7.7							
N2-S3			8.5	21.0	7.8									
N2-P3.5		5.3				9.5	7.3							
N2-M3(RAP2-3.5)			6.4	12.0	26.0			11.0						
N2-M4		8.4				19.0	35.2		16.7					
N2-M5			10.5	13.6	29.7			13.9						
N2-4(RAP2-4)		17.0				43.7	21.2							
N2-5(RAP2-5)			21.0	25.0	16.7									
N2-6(RAP2-6)		15.0				15.0	15.0							
N2-8(RAP2-8)			17.0	17.0	17.0									
N2-10		21.0				21.0	21.0							
N2-12			25.0	25.0	25.0									
N2-14		29.0				29.0	29.0							
N2-16			33.0	33.0	33.0									
N2-20		37.0				37.0	37.0							


注1) ( )はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No. JIS C 2805

注2) ※印は電線の合計断面積が0.5mm<sup>2</sup>以上となる様にして使用すればより確実になります。(例:0.3mm<sup>2</sup>を2つ折りにして圧着、0.5mm<sup>2</sup>はそのまま圧着)

注3) 本製品の中には多少納期を要するものもあります。

注4) NO.5-( )におけるUL登録の適用電線はAWG#26~AWG#22です。

●ナイロンは吸湿性がありますので保管等にご注意ください。

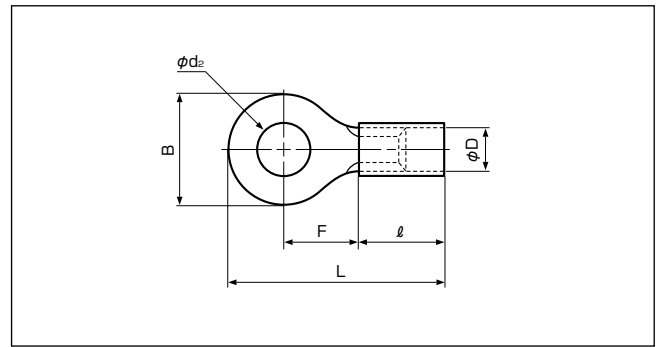

形番	規格	寸法(mm)						標準色	適用電線範囲 撚線(mm <sup>2</sup> )	適用圧着工具			1箱 入数 (個)	
		φd2	B	L	F	ℓ	φD			板厚	手動	空気圧式		油圧式
N5.5-3		3.2	9.5	26.5	8.3	13.5	5.4	1.0	黄	2.63~6.64 (3.5(AWG#12)) (5.5(AWG#10))	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500
N5.5-S3		3.7	7.2	23.0	5.9									
N5.5-S4		4.3	9.5	26.5	8.3									
N5.5-4(RAP5.5-4)														
N5.5-5(RAP5.5-5)		5.3	13.2	29.1	9.0									
N5.5-S5														
N5.5-6(RAP5.5-6)		6.4	12.0	32.5	13.0									
N5.5-S6														
N5.5-S8		8.4	13.2	29.1	9.0									
N5.5-8(RAP5.5-8)														
N5.5-10(RAP5.5-10)		10.5	15.0	34.7	13.7									
N5.5-12		13.0	19.2	39.1	16.0									
N5.5-14		15.0	32.0	54.8	25.3									
N5.5-16		17.0												
N5.5-18		19.0												
N5.5-20		21.0												
														250


注1) ( )はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No. JIS C 2805

注2) 本製品の中には多少納期を要するものもあります。

● ナイロンは吸湿性がありますので保管等にご注意ください。



# ■ナイロン絶縁付丸形端子(F形)

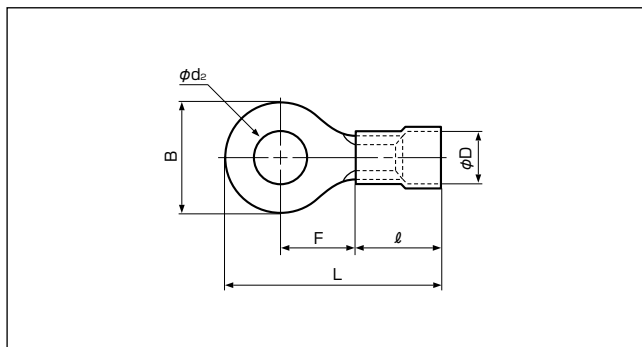

E42024  
 LR20812  
 JQ0608019  
 JIS C 2805

形番	規格	寸法(mm)							標準色	適用電線範囲 撚線(mm <sup>2</sup> )	適用圧着工具			1箱 入数 (個)
		φd2	B	L	F	ℓ	φD	板厚			手動	空気圧式	油圧式	
FN0.5-2		2.2	5.2	16.4	5.8	8.0	2.9	0.5	黄透明	0.2~0.5 (0.2 (AWG#24) 0.3 (AWG#22) 0.5)	YNT-2622	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A	BCT-0514	1,000
FN0.5-3		3.2												
FN0.5-3.7		3.7												
FN0.5-4		4.3												
FN0.5-5		5.3												
FN1.25-2		2.2	5.5	15.7	4.0	9.0	4.0	0.8	赤	※ 0.25~1.65 ※ (0.3 (AWG#22) 0.5 (AWG#20) 0.75 (AWG#18) 0.9 1.25 (AWG#16))	YNT-2216	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	1,000
FN1.25-3(RBP1.25-3)		3.2												
FN1.25-MS3		3.2	17.4	5.6										
FN1.25-L3		3.2	8.0	20.0	7.0									
FN1.25-3.7		3.7	5.5	15.7	4.0									
FN1.25-M3(RBP1.25-3.5)		3.7	6.6	18.6	6.3									
FN1.25-M4		4.3	8.0	20.0	7.0									
FN1.25-4(RBP1.25-4)		4.3												
FN1.25-5(RBP1.25-5)		5.3	8.0	20.0	7.0									
FN1.25-6		6.4	11.6	25.9	11.1									
FN1.25-8		8.4												
FN1.25-10		10.5	13.6	29.7	13.9									
FN2-S2		2.2	6.4	16.5	4.3	9.0	4.5	0.8	青	1.04~2.63 (1.25 (AWG#16) 2.0 (AWG#14))	YNT-1614	YA-1 YA-2 YAT-1A YAT-2A YAD-1A YAD-2A YA-4 YAT-4A YAD-4A	BCT-0514	500
FN2-MS3		3.2	5.5	17.4	5.6									
FN2-S3.3		3.2	6.4	16.5	4.3									
FN2-3		3.2	8.5	21.0	7.8									
FN2-S3		3.2	6.4	16.5	4.3									
FN2-P3.5		3.7	7.0	20.2	7.7									
FN2-M3(RBP2-3.5)		3.7	6.6	18.6	6.3									
FN2-M4		4.3	7.0	20.2	7.7									
FN2-P4		4.3												
FN2-4(RBP2-4)		4.3	8.5	21.0	7.8									
FN2-M5		5.3	9.5											
FN2-5(RBP2-5)		5.3	9.5	12.0	26.0	11.0								
FN2-6(RBP2-6)		6.4	12.0											
FN2-8(RBP2-8)		8.4	12.0	26.0	11.0									
FN2-10		10.5	13.6	29.7	13.9									
FN2-12		13.0	19.0	35.2	16.7									
FN2-14		15.0	27.0	43.7	21.2									
FN2-16		17.0												
FN2-20		21.0												


注1) ( )はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No. JIS C 2805












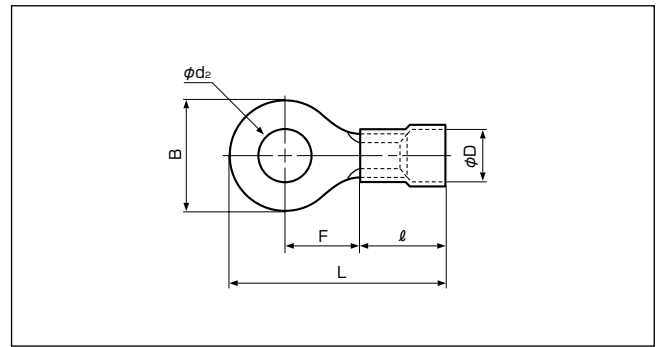

























注2) ※印は電線の合計断面積が0.5mm<sup>2</sup>以上となる様にして使用すればより確実になります。(例:0.3mm<sup>2</sup>を2つ折りにして圧着、0.5mm<sup>2</sup>はそのまま圧着)

注3) 本製品の中には多少納期を要するものもあります。

注4) FN0.5-( )におけるUL登録の適用電線はAWG#26~AWG#22です。

●ナイロンは吸湿性がありますので保管等にご注意ください。



形番	規格	寸法(mm)							標準色	適用電線範囲 撚線(mm <sup>2</sup> )	適用圧着工具			1箱 入数 (個)
		φd2	B	L	F	ℓ	φD	板厚			手動	空気圧式	油圧式	
FN5.5-3	 	3.2	9.5	26.5	8.3	13.5	6.8	1.0	黄	2.63~6.64 { 3.5 (AWG#12) 5.5 (AWG#10) }	YNT-1210S	YA-4 YAT-4A YAD-4A	BCT-0514	500
FN5.5-S3	 	3.7	7.2	23.0	5.9									
FN5.5-S4	 	4.3	9.5	26.5	8.3									
FN5.5-4(RBP5.5-4)	  													
FN5.5-5(RBP5.5-5)	  	5.3	13.2	29.1	9.0									
FN5.5-S5	 													
FN5.5-6(RBP5.5-6)	  	6.4	12.0	32.5	13.0									
FN5.5-S6	 													
FN5.5-S8	 	8.4	13.2	29.1	9.0									
FN5.5-8(RBP5.5-8)	  													
FN5.5-10(RBP5.5-10)	  	10.5	15.0	34.7	13.7									
FN5.5-12	 	13.0	19.2	39.1	16.0									
FN5.5-14	 	15.0	32.0	54.8	25.3									
FN5.5-16	 	17.0												
FN5.5-18	 	19.0												
FN5.5-20	 	21.0												

注1) ( )はJIS規格形番を示します。なお、JIS規格形番製品とJST形番製品は同一品です。規格No. JIS C 2805

注2) 本製品の中には多少納期を要するものもあります。

● ナイロンは吸湿性がありますので保管等にご注意ください。